
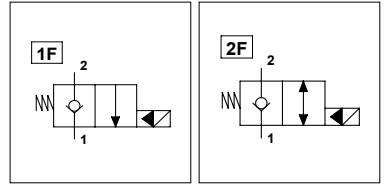


### WST - NC



#### TECHNICAL DATA

- **Flow:** See table
- **Max working pressure:** 350 bar
- **Materials:** Cartridge in Steel zinc plated
- **Version:** Poppet Type - Pilot Acting
- **Cavity:** See table
- **Installation torque:** See table
- **Weight:** See table

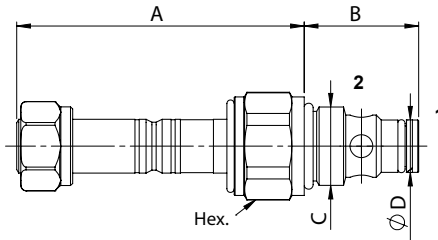

PORTS			
Size	S08	S10	S12
DIMENSIONS			
A	69,4	67	64
B	27,6	32	46
C	3/4-16UNF	7/8-14UNF	1 1/16-12UNF
D	12,7	15,8	22,2
Hex.	24	27	32
Max Flow (l/min)	40	70	150
Cavity	FW3402000	FW7802000	FW1160200
Installation torque (Nm)	30	40	60
Weight (kg)	0,160	0,190	0,260

#### PRESSURE DROP CURVES

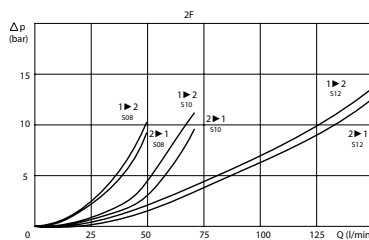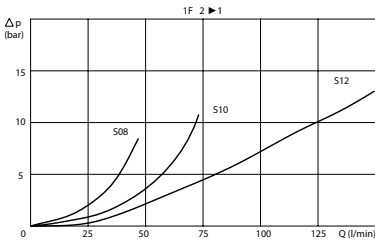

#### MANUAL OVERRIDE

(EMS)  
Screw



#### ORDERING CODE

WST

NC

#### Ports Size:

- S08 = SAE 08/2
- S10 = SAE 10/2
- S12 = SAE 12/2

#### Type of Scheme:

- Omit for scheme 1F
- 2F = Scheme 2F

#### Manual Override:

- Omit if not required
- EMS = Screw